



Features

- Over 28 finishes including 13 PVD finishes
- All brass construction
- 1/4 turn ceramic disc cartridge(s)
- Flexible braided hoses for ease of installation
- 4" spout center to center
- 1.2 gpm (4.5 L/min) max flow rate
- ϕ 1-1/4" all brass lift rod style pop up drain assembly


Codes/Standards

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61 & NSF/ANSI 372
- CEC & DOE
- Commonwealth of MA
- EPA WaterSense High Efficiency Lavatory
- ADA compliant



3307 shown

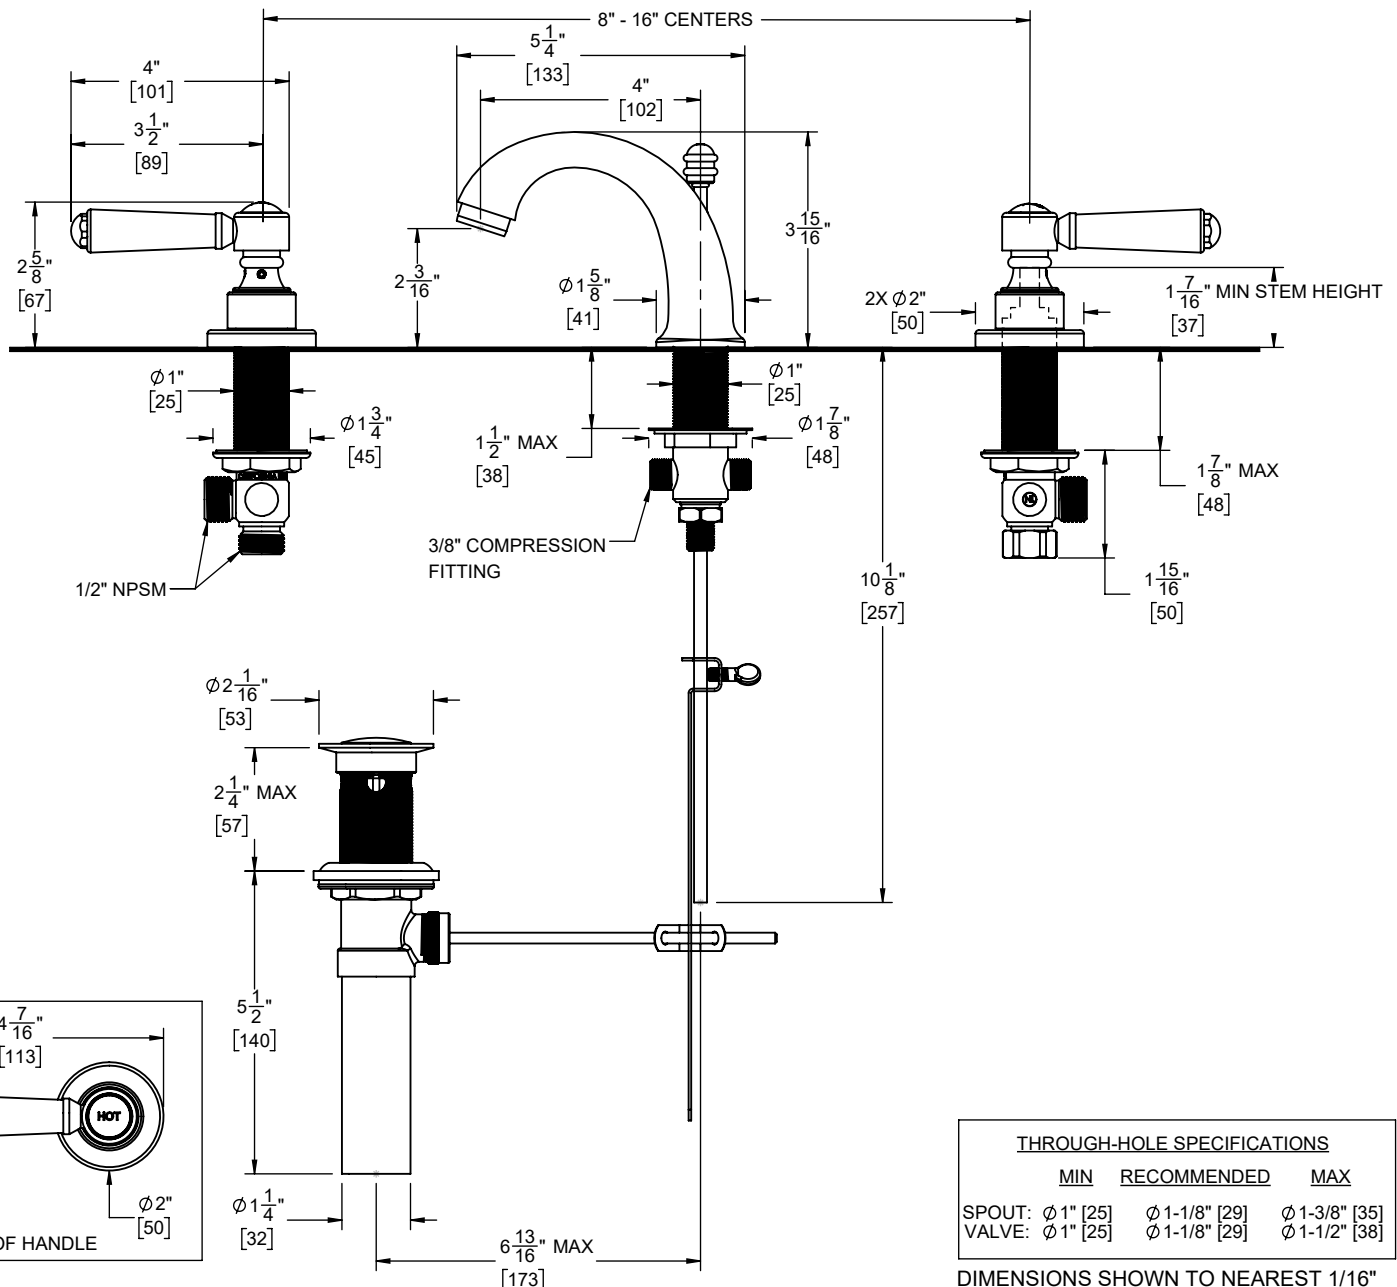

THROUGH-HOLE SPECIFICATIONS		
MIN	RECOMMENDED	MAX
SPOUT: ϕ 1" [25]	ϕ 1-1/8" [29]	ϕ 1-3/8" [35]
VALVE: ϕ 1" [25]	ϕ 1-1/8" [29]	ϕ 1-1/2" [38]

DIMENSIONS SHOWN TO NEAREST 1/16"
[DIMENSIONS SHOWN TO NEAREST 1mm]

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE