

Features

- *Tub filler Maximum flow rate: 15 gpm (58.6 L/min) at 60 psi*
- *Handshower flow rate: 2.0 gpm (7.6 L/min) or 1.8 gpm (6.8 L/min)*
- *Handshower bracket may be placed on COLD or HOT side of body*
- *1/4 turn ceramic disc cartridges*
- *All brass construction*
- *Over 28 finishes including 13 PVD finishes*

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- CEC (1.8 gpm) / DOE (2.0 gpm & 1.8 gpm)
- Commonwealth of MA
- ADA compliant (with lever handles)
- Local codes may require installation of an upstream tempering valve



8508-ETD.18 SHOWN



8508W-ETD.20


8508W-ETD.18

8508B-ETD.20

8508B-ETD.18

8508-ETD.20

8508-ETD.18

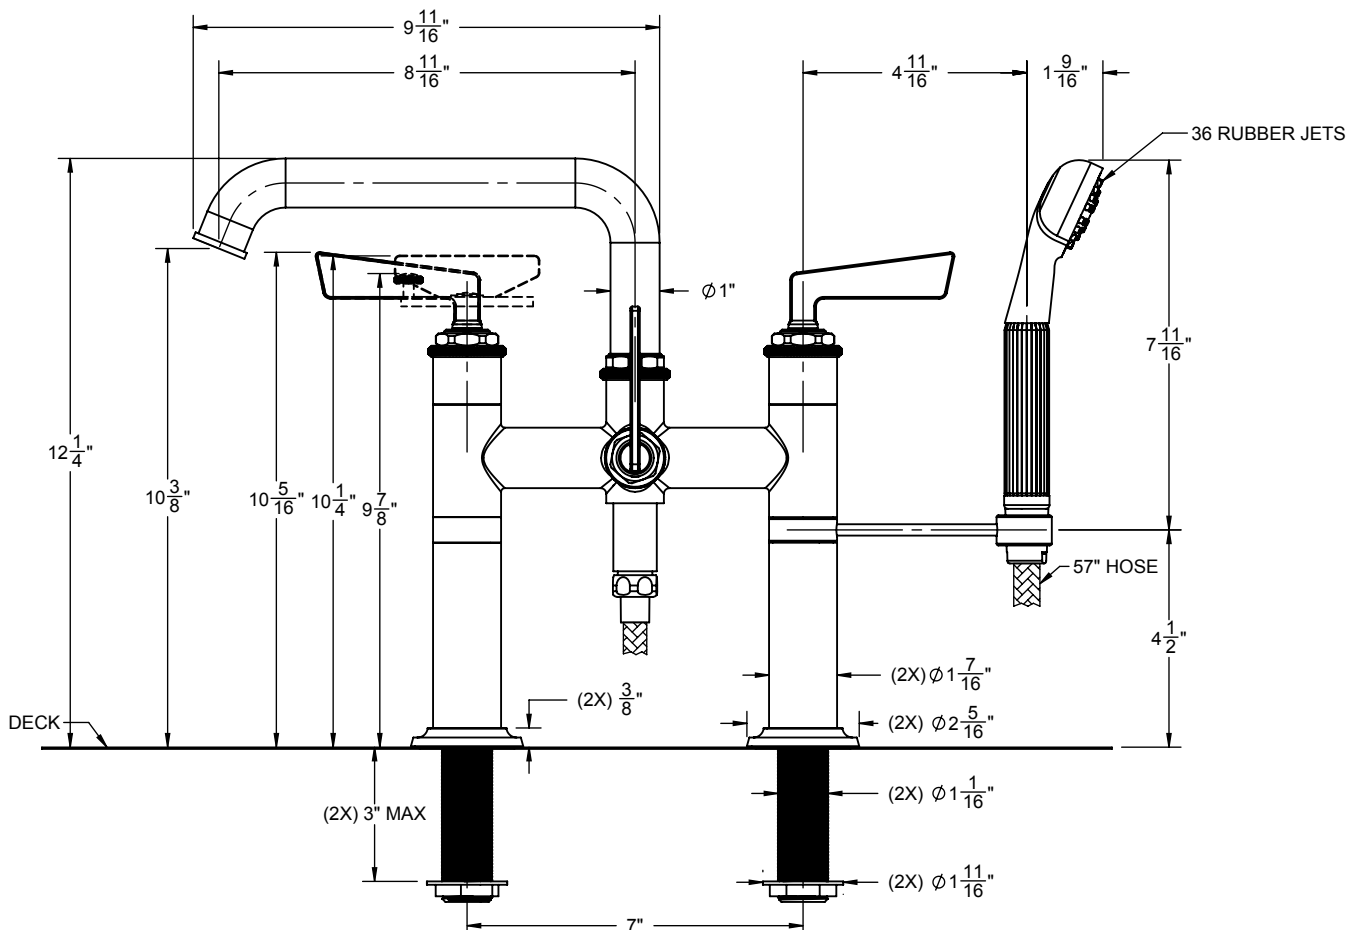

THROUGH-HOLE SPECIFICATIONS		
MIN	RECOMMENDED	MAX
Ø 1-1/16"	Ø 1-5/16"	Ø 1-3/8"