



California Faucets®

Huntington™

WALL LAVATORY

Features

- Over 28 finishes including 13 PVD finishes
- All brass construction
- 1.2 gpm (4.5 L/min) max flow rate
- Rough valve (CF-VL-R) sold separately

Codes/Standards

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61 & NSF/ANSI 372
- CEC & DOE
- Commonwealth of MA
- EPA WaterSense High Efficiency Lavatory
- ADA compliant

CF-TO-V4202-7/9





CF-TO-V4202-9 shown



THROUGH-HOLE SPECIFICATIONS

MIN	RECOMMENDED	MAX
SPOUT: $\varnothing 1"$	$\varnothing 1-1/4"$	$\varnothing 1-3/4"$
VALVE: $\varnothing 1-1/4"$	$\varnothing 1-1/4"$	$\varnothing 1-13/16"$

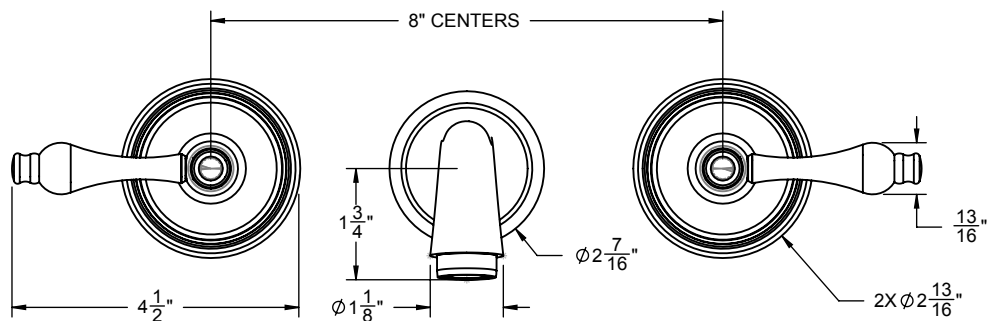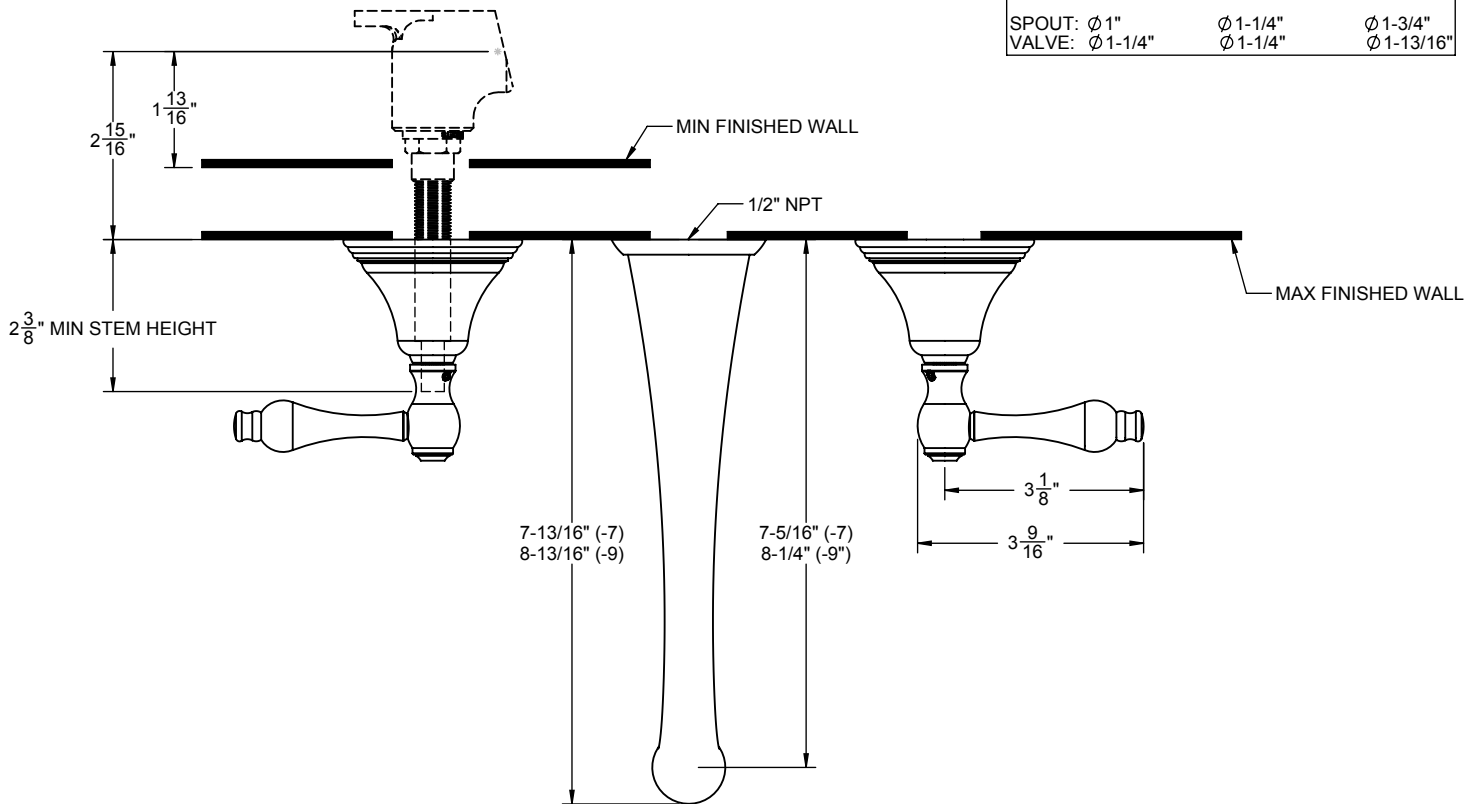

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"