



California Faucets®

Rincon Bay™

WALL LAVATORY

CF-TO-V4502X-7/9


Features

- Over 28 finishes including 13 PVD finishes
- All brass construction
- 1.2 gpm (4.5 L/min) max flow rate
- Rough valve (CF-VL-R) sold separately


Codes/Standards

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61 & NSF/ANSI 372
- CEC & DOE
- Commonwealth of MA
- EPA WaterSense High Efficiency Lavatory

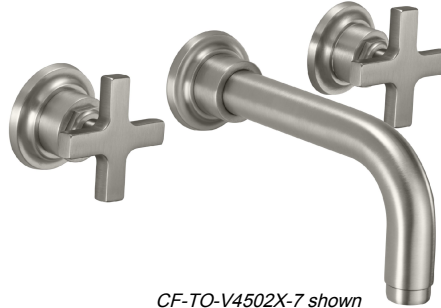

CF-TO-V4502X-7 shown

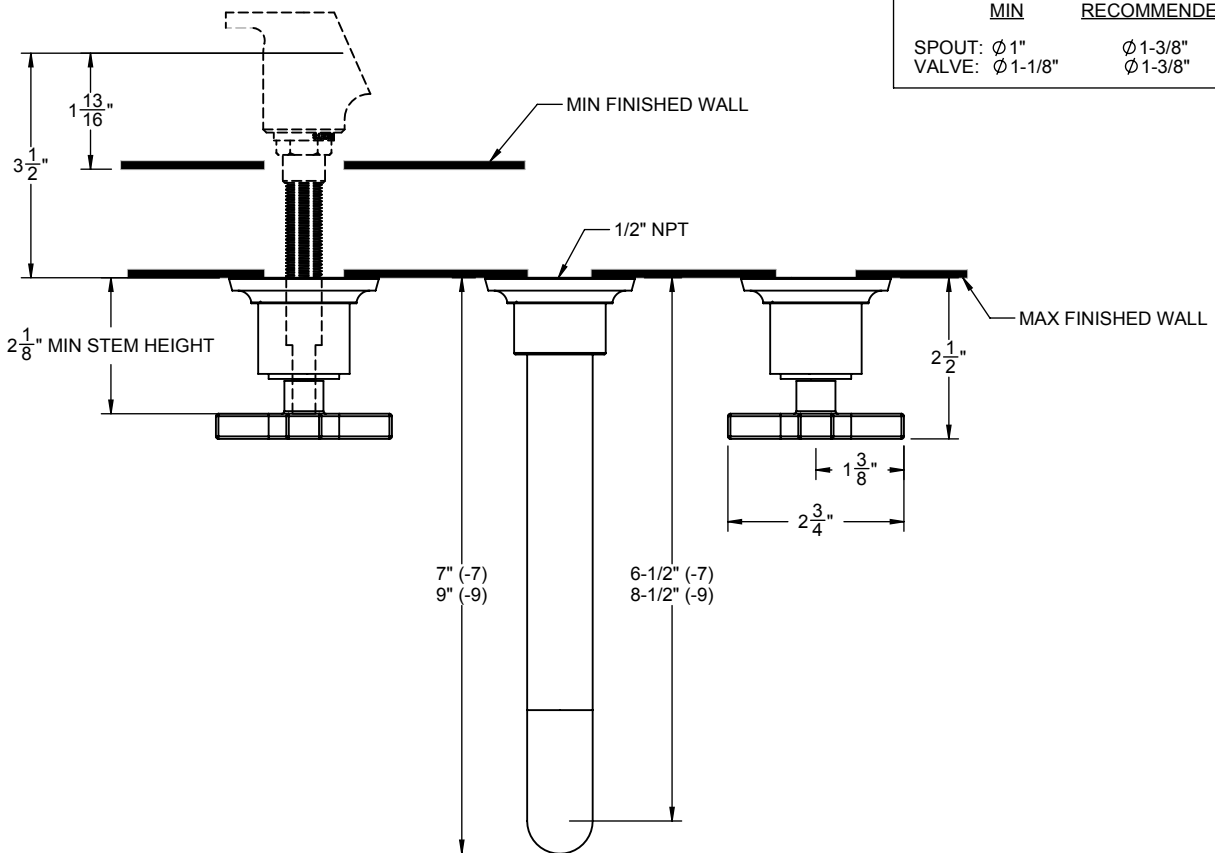

THROUGH-HOLE SPECIFICATIONS

MIN	RECOMMENDED	MAX
SPOUT: Ø 1"	Ø 1-3/8"	Ø 1-5/8"
VALVE: Ø 1-1/8"	Ø 1-3/8"	Ø 1-5/8"

