





Features


- 8-1/2" to center spout projection Max flow rate: 16 gpm (60.6 L/min) For use with StyleTherm, 3-VR or 2-VR valves Solid brass construction Over 30 finishes including 15 PVD finishes



Codes/Standards Applicable Product meets or exceeds the following:

• ASME A112.18.1/CSA B125.1

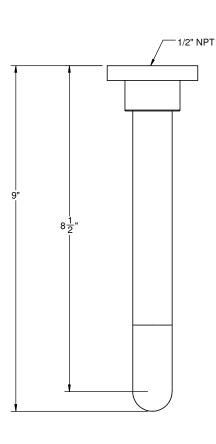



THROUGH-HOLE SPECIFICATIONS		
MIN	RECOMMENDED	MAX
Ø1"	Ø1-1/4"	Ø1-15/16"

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"