






Features

- Over 30 finishes including 14 PVD finishes
- Solid brass construction
- Spout has easy Quick Connect fitting
- Maximum flow rate: 16 gpm (60.6 L/m)
- Rough valves & Quick Connect (08-75-99) sold separately
- For additional product offerings, see www.californiafaucets.com

Codes/Standards Applicable

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- ADA (with lever handles)

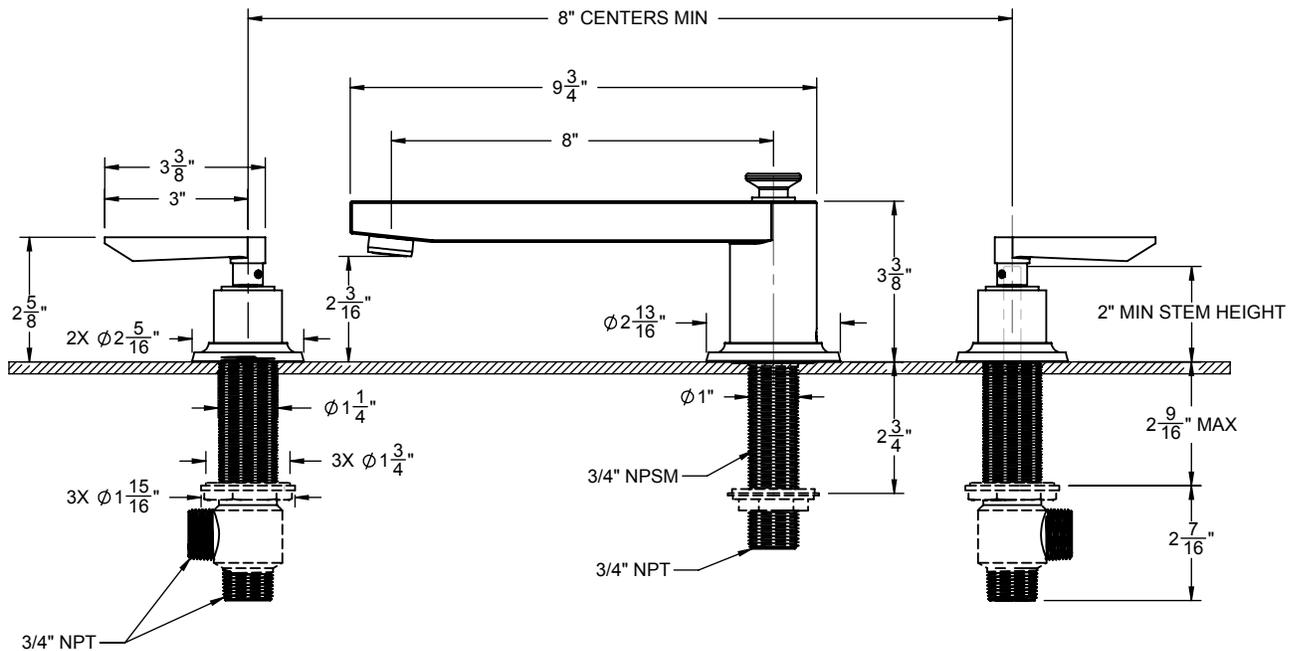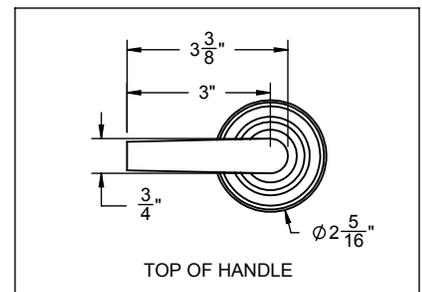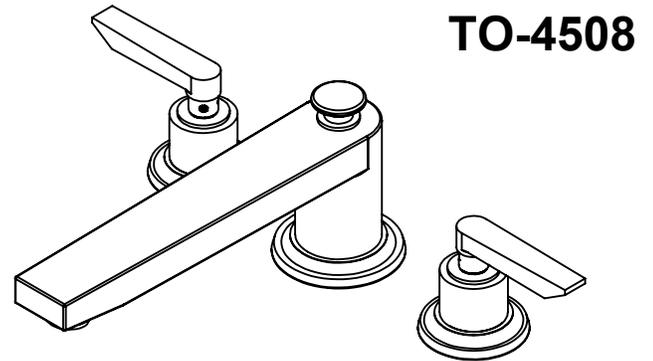

THROUGH-HOLE SPECIFICATIONS		
	MIN	RECOMENDED
SPOUT:	$\phi 1$ "	$\phi 1\text{-}3/8$ "
VALVE:	$\phi 1\text{-}1/4$ "	$\phi 1\text{-}3/8$ "

ALL DIMENSIONS SHOWN TO NEAREST 1/16"