



Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Spout has easy Quick connect fitting
- 16 gpm (60.6 L/min) max flow rate
- Rough Valve & Quick Connect (08-75-65) sold separately






TO-6608

Codes/Standards

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ADA compliant

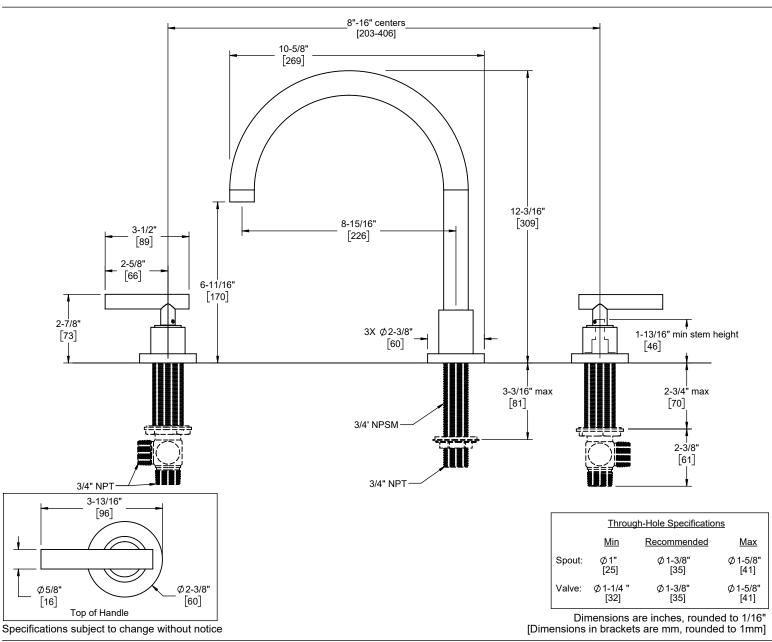

H